



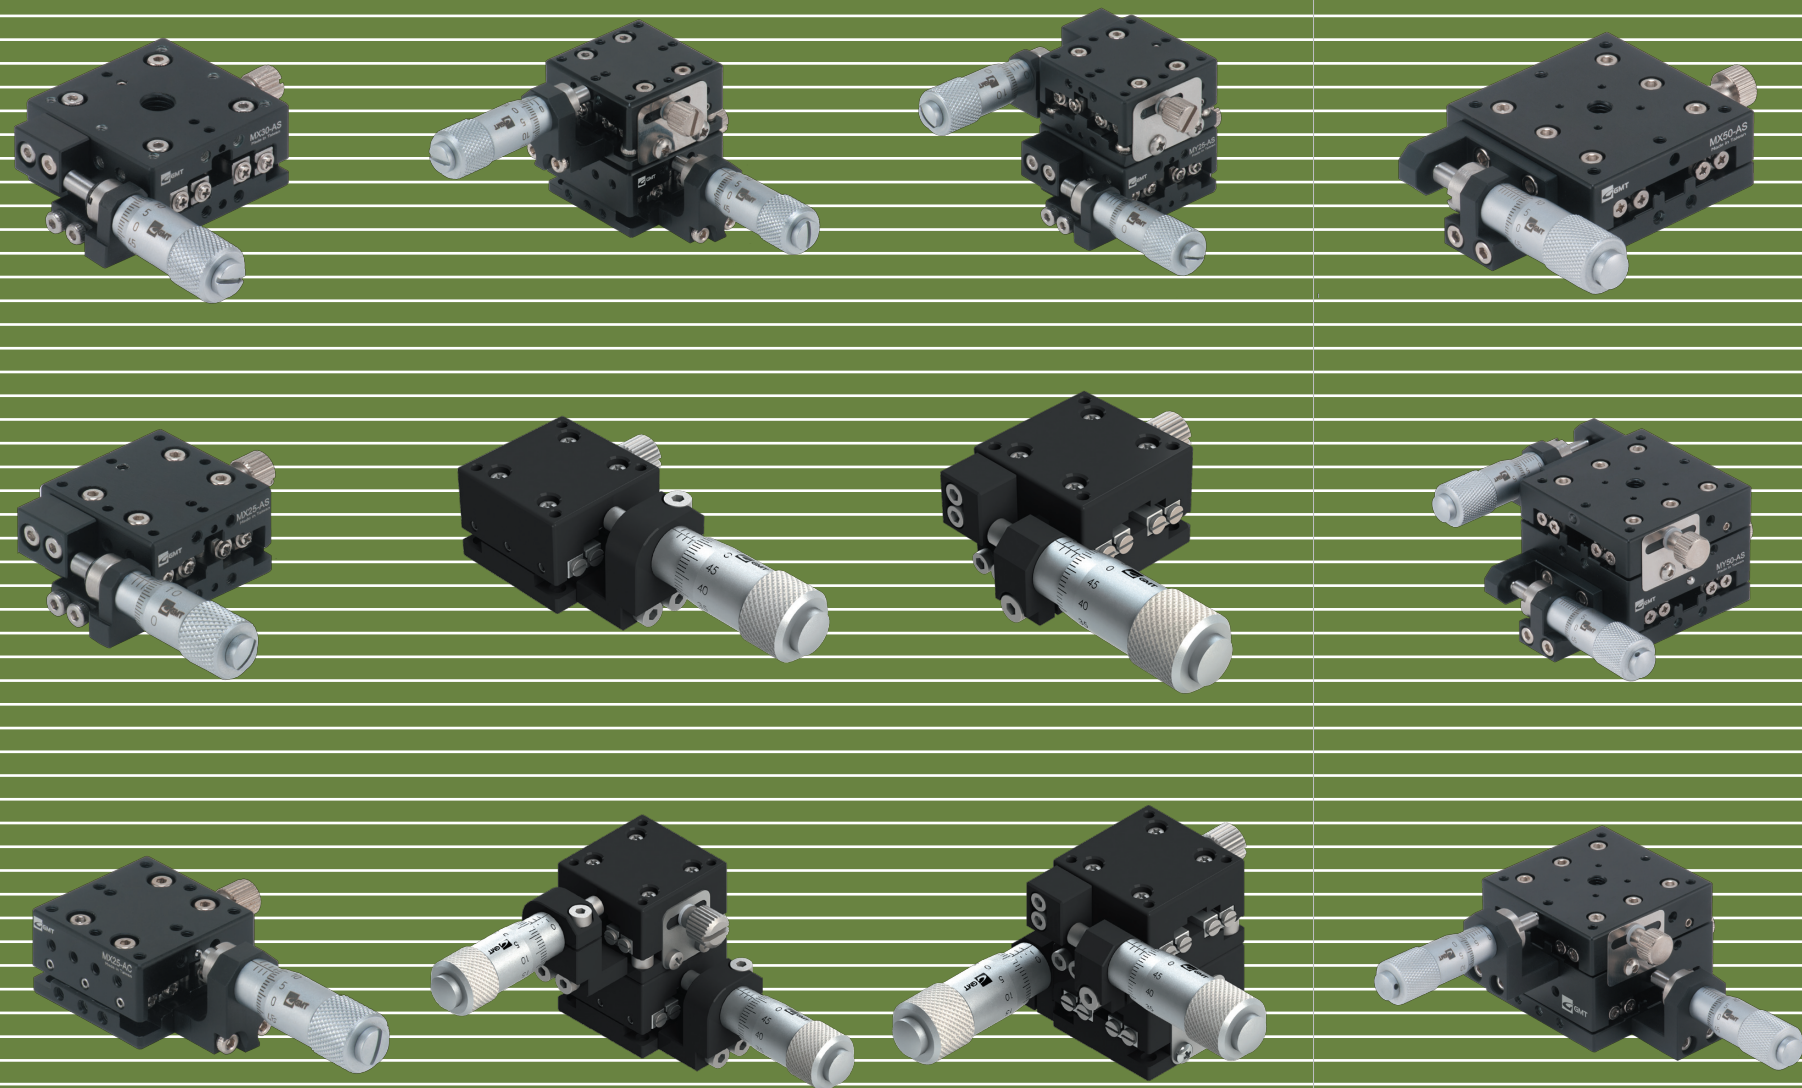

Product
Specification
**Positioning
Stages**

MX764-AC-SHR

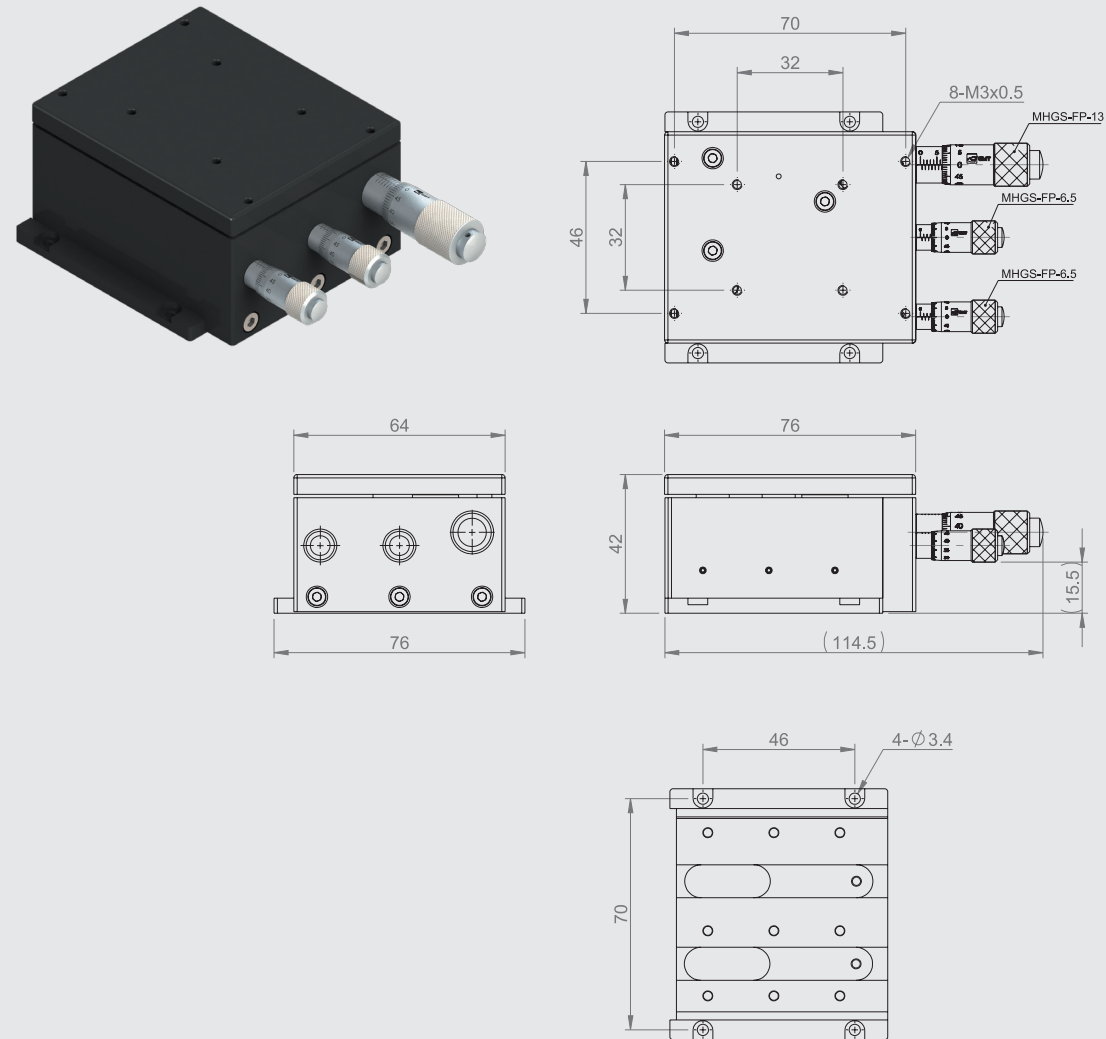


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX764-AC-SHR	76*64	X-axis	Cursory : ± 6.5	Cursory : 10	3	1.5	0.6	Aluminum alloy	Black anodized
			Medium : ± 0.325	Medium : 1					
			Fine : ± 0.0325	Fine : 0.1					

MBZ20-AML

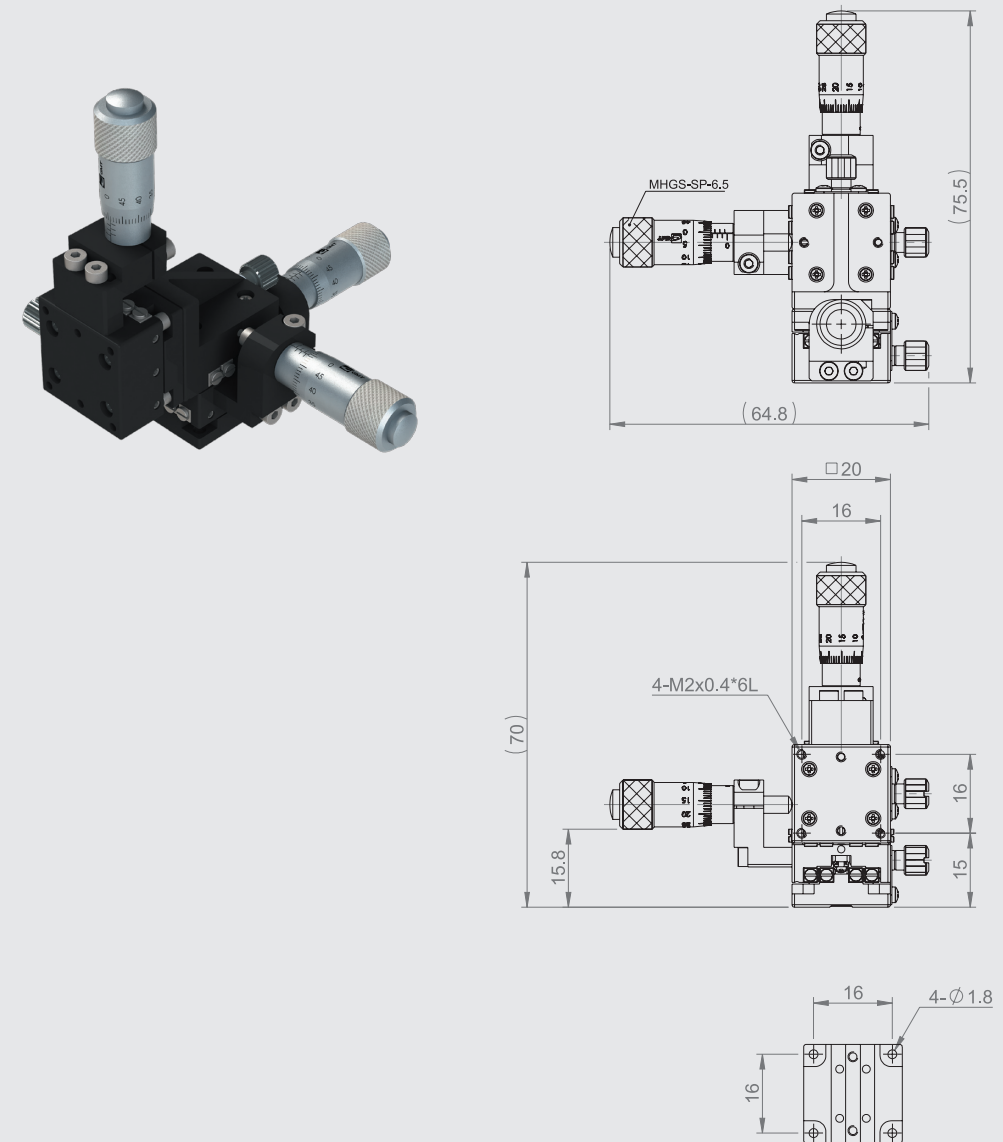


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MBZ20-AML(R)	20*20	XYZ-axis	± 3	10	3	1	0.08	Aluminum alloy	Black anodized

※The 2D drawing shown was copied from MBZ20-AMR.

MBZ30-AML

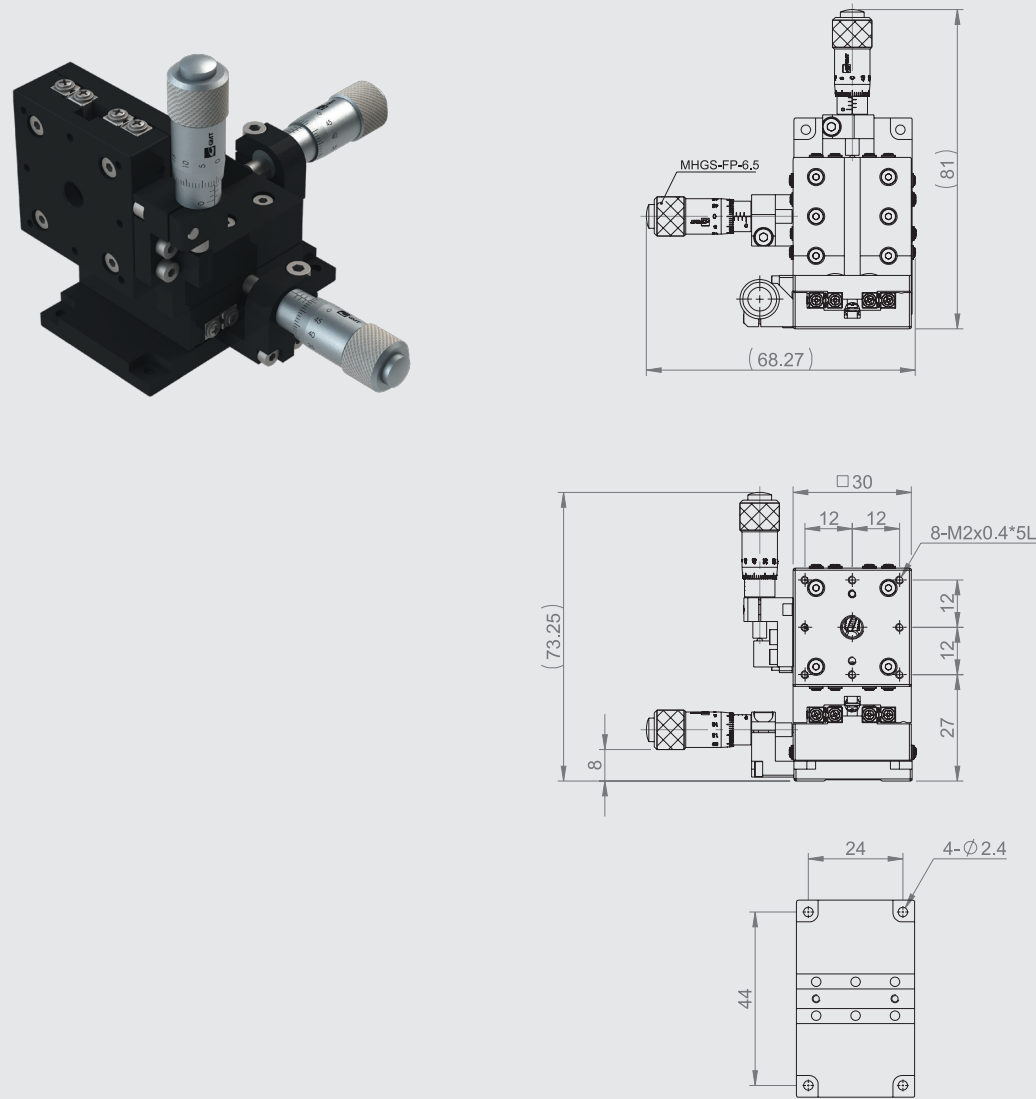


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MBZ30-AML(R)	30*30	XYZ-axis	±3.25	10	3	1.5	0.18	Aluminum alloy	Black anodized

※The 2D drawing shown was copied from MBZ30-AMR.

MYCP40-A


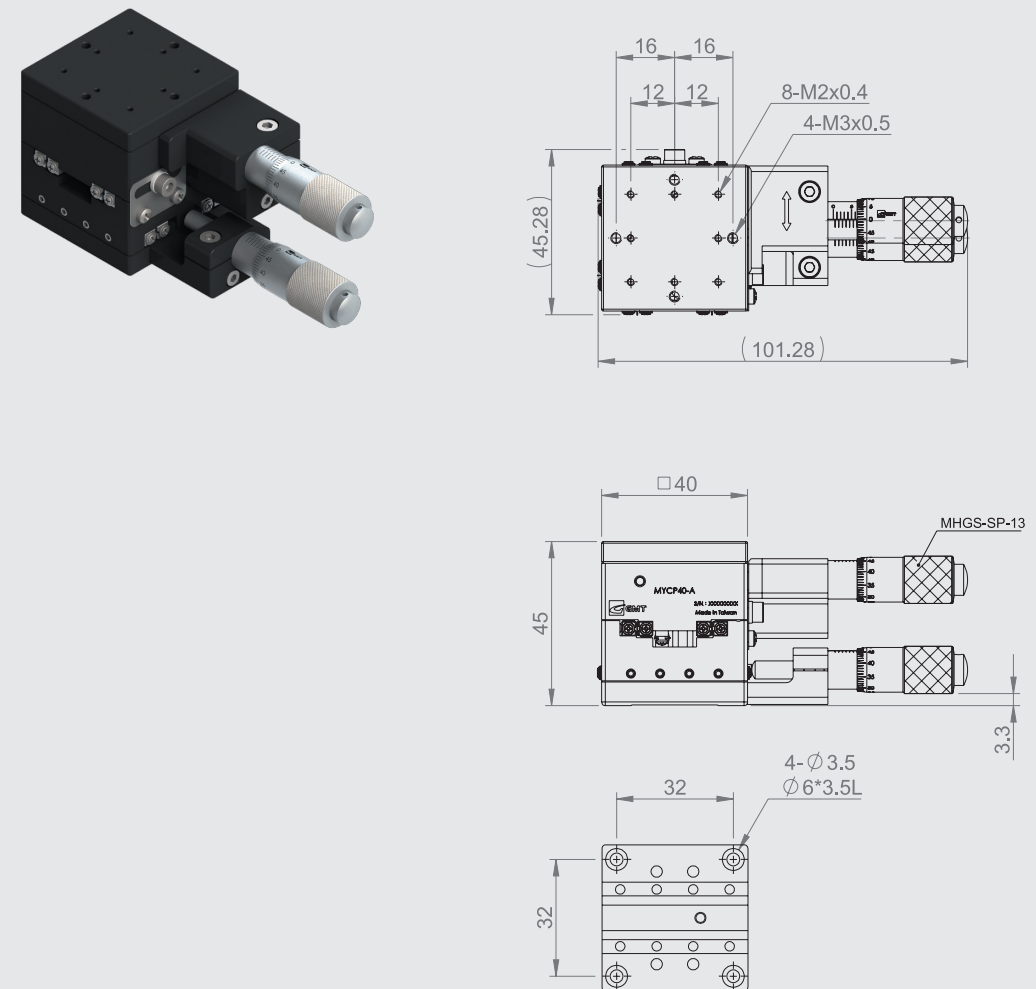


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MYCP40-A	40*40	XY-axis	±6.5	10	3	1.8	0.28	Aluminum alloy	Black anodized

MYCP60-A



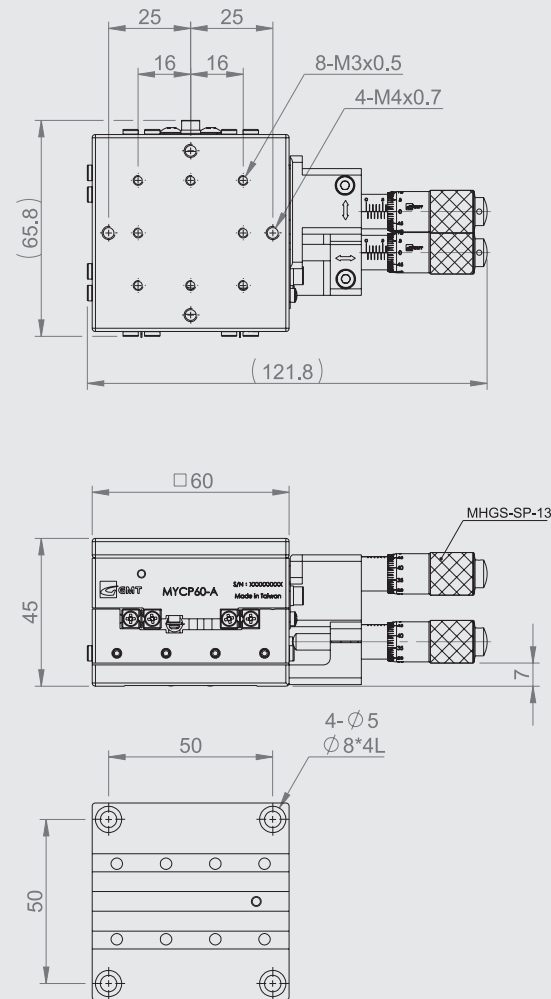
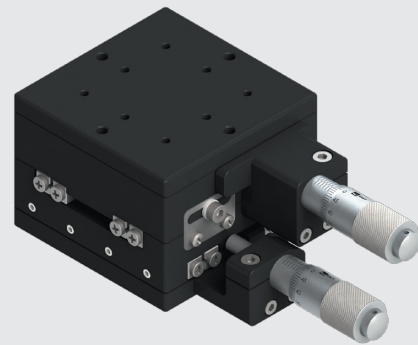


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MYCP60-A	60*60	XY-axis	±6.5	10	3	4.5	0.5	Aluminum alloy	Black anodized

MPS20-AML-18

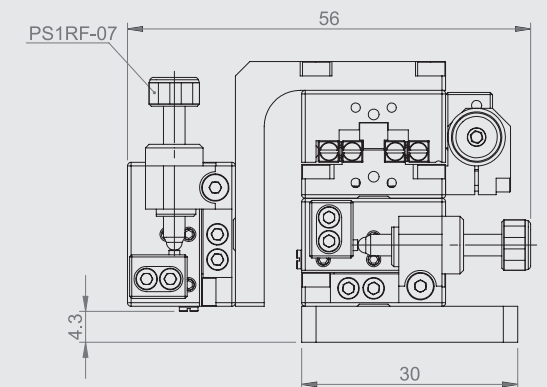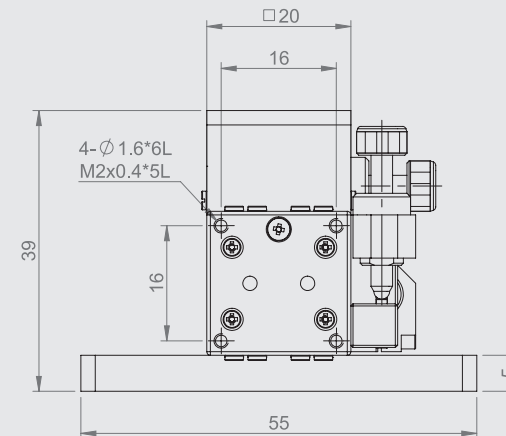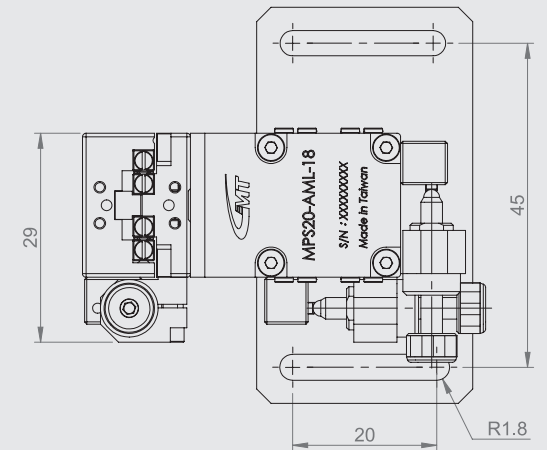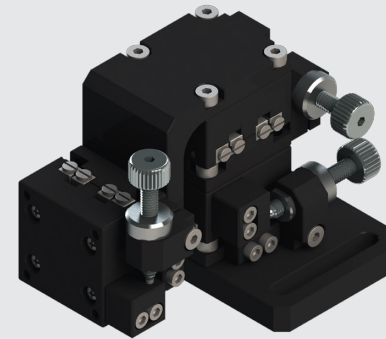


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Movement Per Knob Rotation	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MPS20-AMR(L)-18	20*20	XYZ-axis	±3	0.5	3	1	0.11	Aluminum alloy	Black anodized

MPS2035-AML

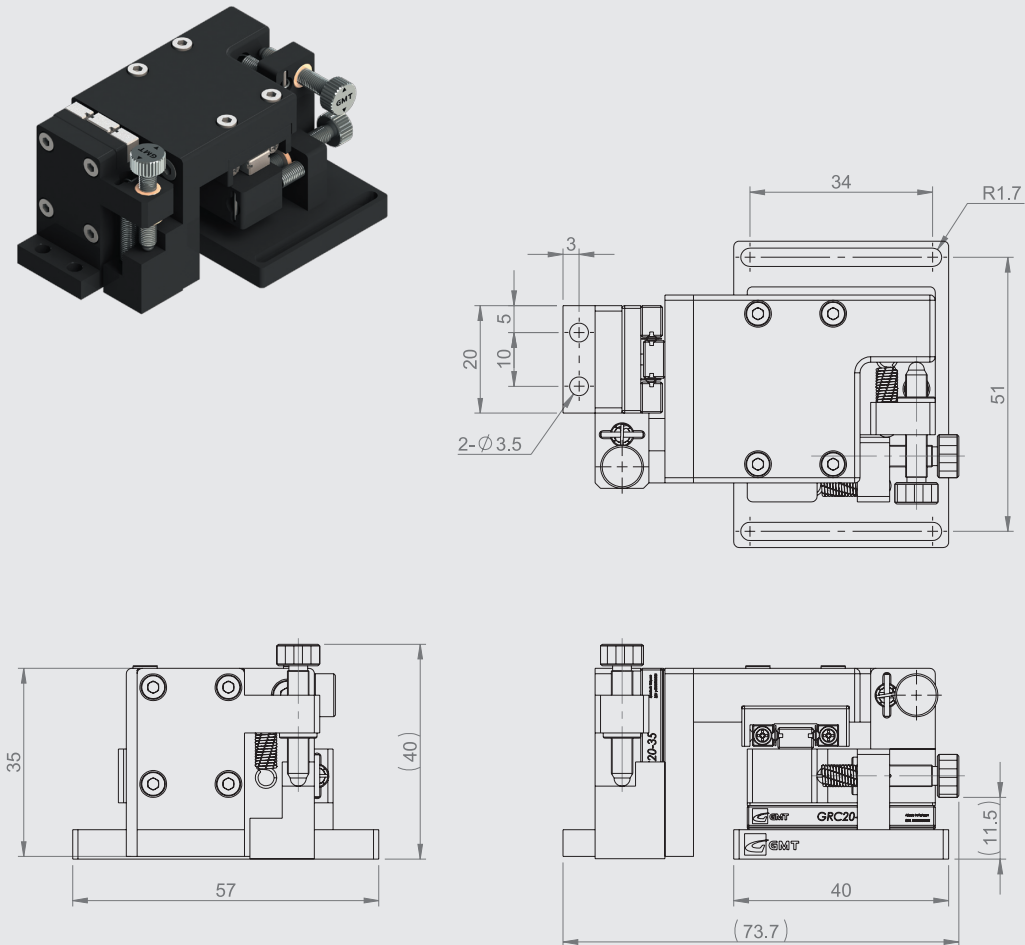


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Movement Per Knob Rotation	Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MPS2035-AMR(L)	20*35	XYZ-axis	±5	0.25	10	3	1.5	0.21	Aluminum alloy	Black anodized

MPS40-SML

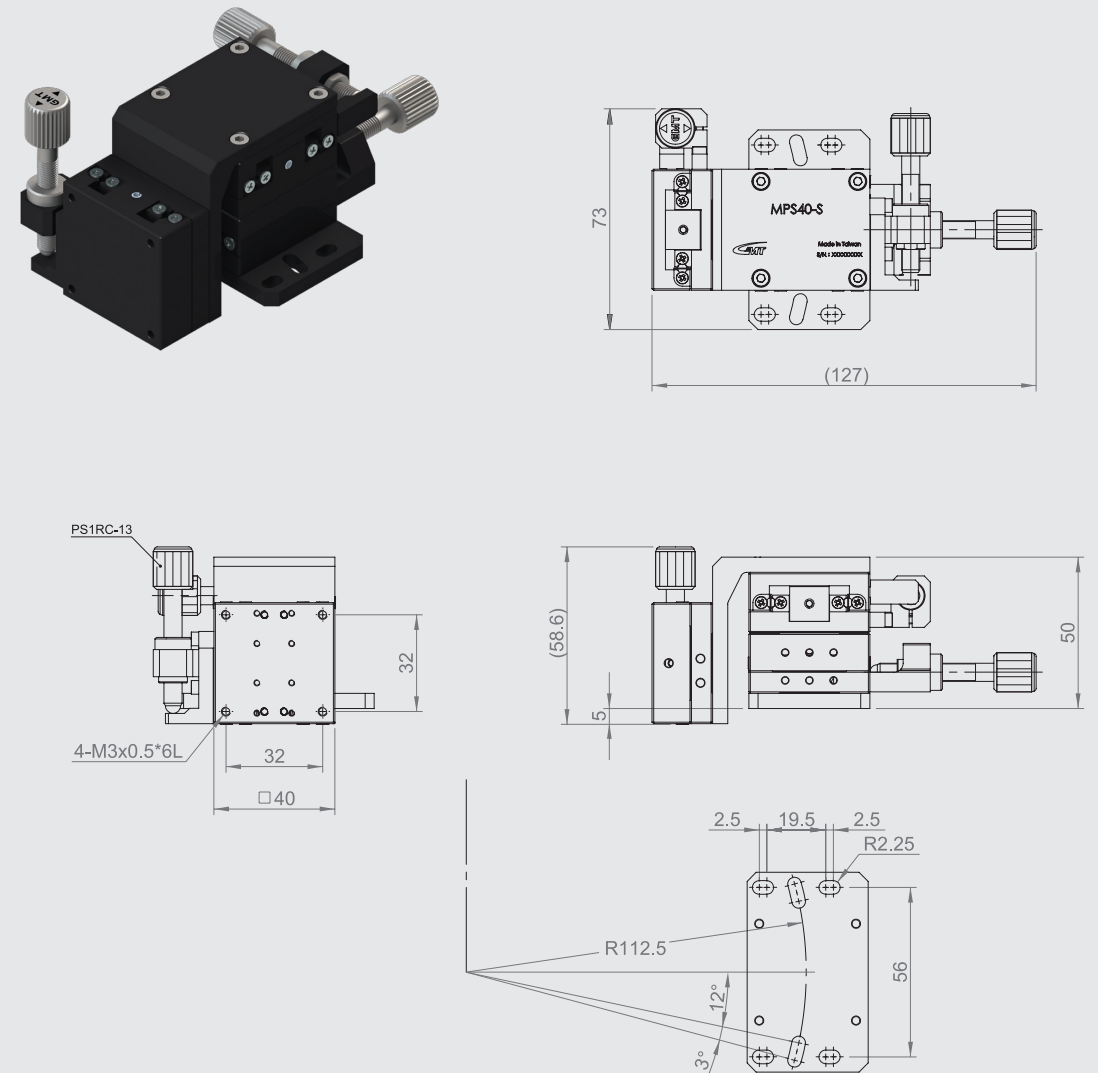


Specification

Unit : mm

Model No.	Table Size	Axis	Travel Stroke	Movement Per Knob Rotation	Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MPS40-SMR(L)	40*40	XYZ-axis	±6.5	0.5	10	3	4.5	0.99	SUS440C	Black Chromium

MXTH80-FCS

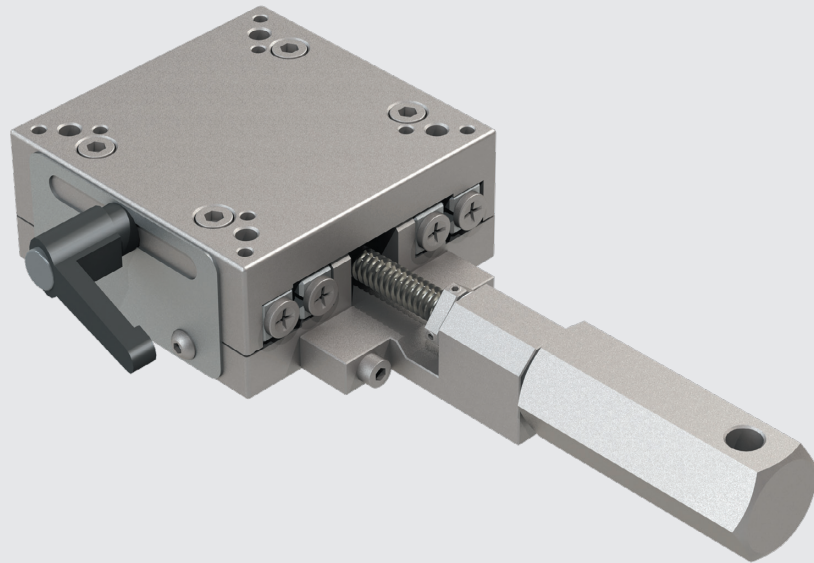

Specification

Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation	Minimum Reading	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MXTH80-FCS	80*80	X-axis	Central	±20	1.25	0.1 mm / Vernier	15	40.5	1.9	Carbon steel	Electroless nickel plating

MXTH80-FCS

