




MX40-SC-28

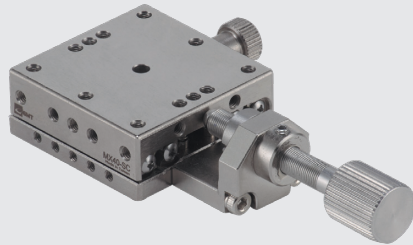


MX40-SS-28



MY40-SC-28

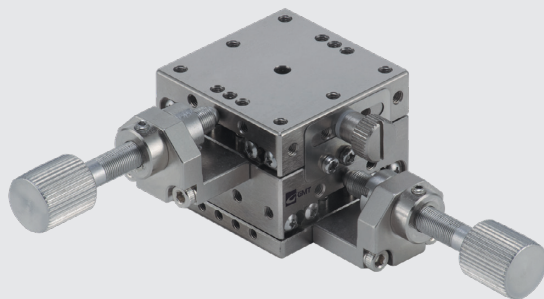

MY40-SS-28

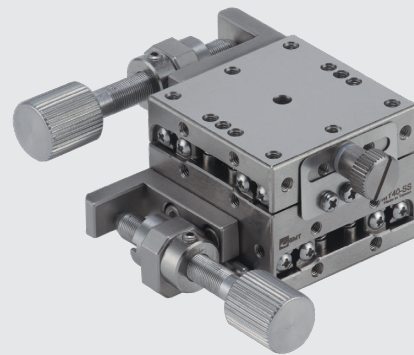


Specification



Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation (mm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX40-SC-28	40*40	X-axis	Central	±6.5	0.5	3	10	0.23	SUS 440C	Electroless nickel plating
MX40-SS-28			Side							
MY40-SC-28		XY-axis	Central				9.7	0.46		
MY40-SS-28			Side							

MX40-SC-28

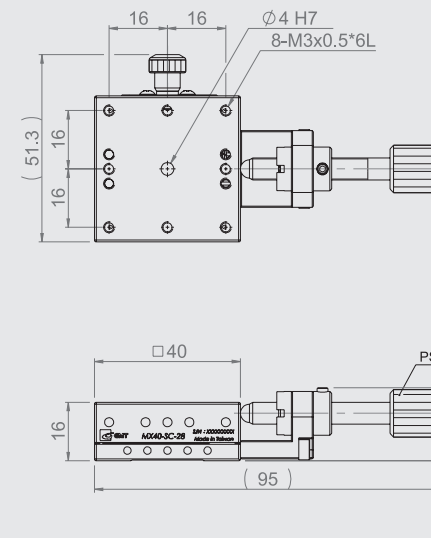


MX40-SS-28

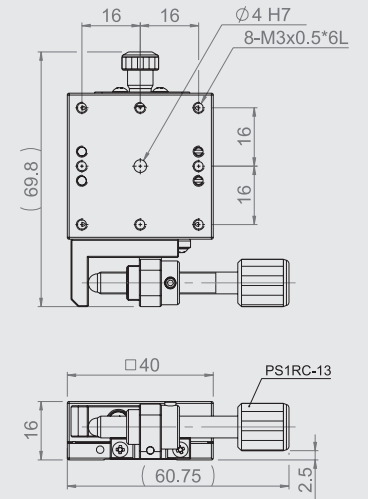


MX(Y)40-S-28
Mounting Dimensions


MY40-SC-28

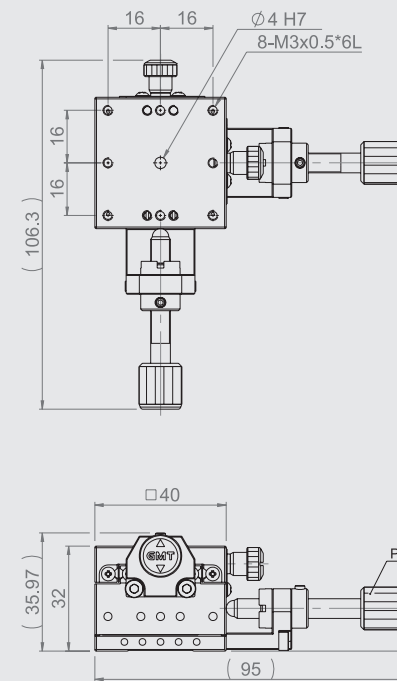

MY40-SS-28

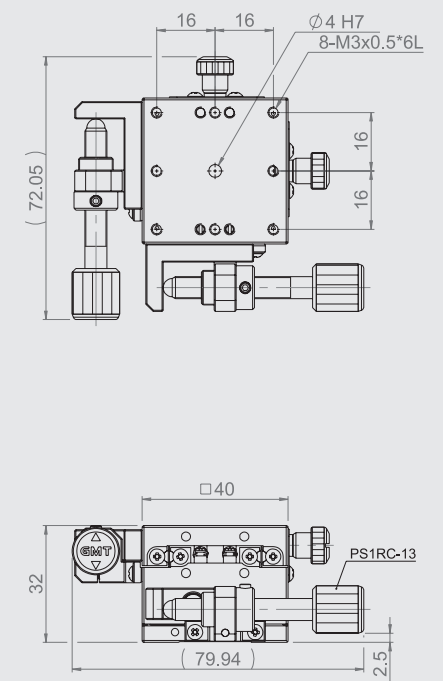

MX50-SC-28

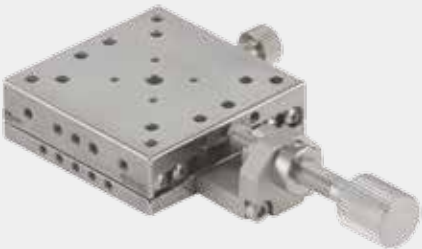

MX50-SS-28



MY50-SC-28



MY50-SS-28




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation (mm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX50-SC-28	50*50	X-axis	Central	±6.5	0.5	3	15	0.28	SUS 440C	Electroless nickel plating
MX50-SS-28			Side							
MY50-SC-28		XY-axis	Central							
MY50-SS-28			Side							


MX50-SC-28

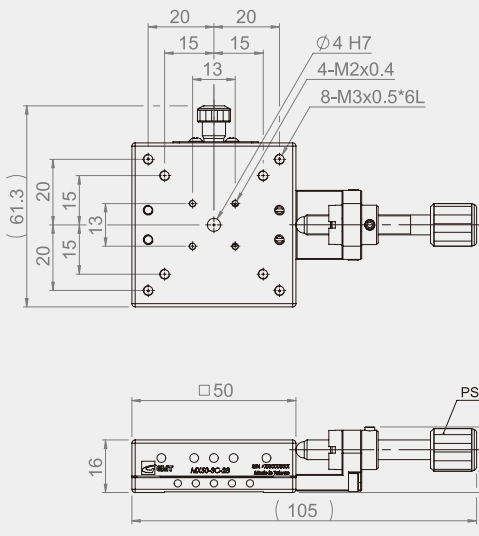


MX50-SS-28

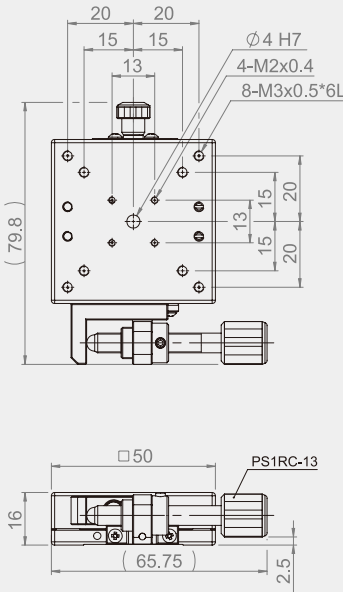



MY50-SC-28

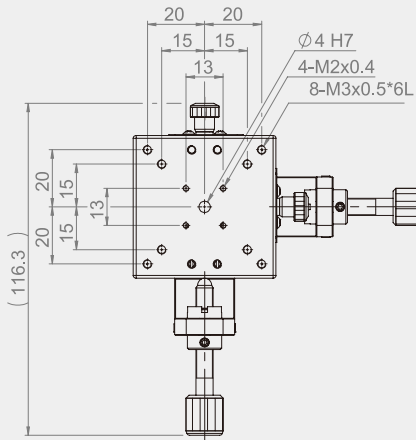


MY50-SS-28

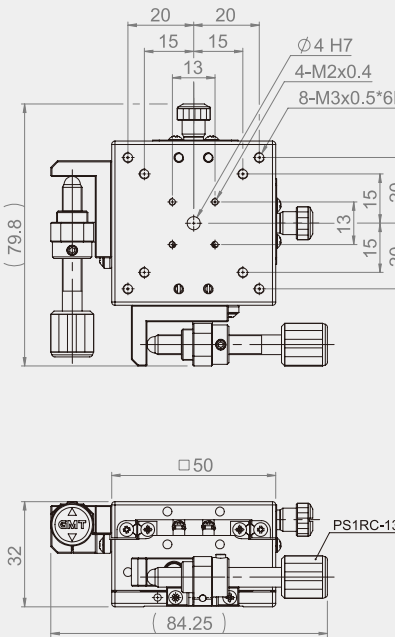

MX(Y)50-S-28
Mounting Dimensions

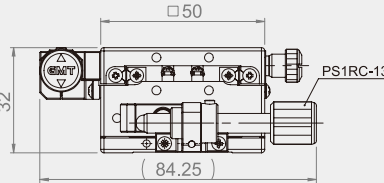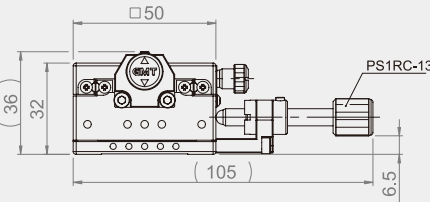

MX60-SC-28

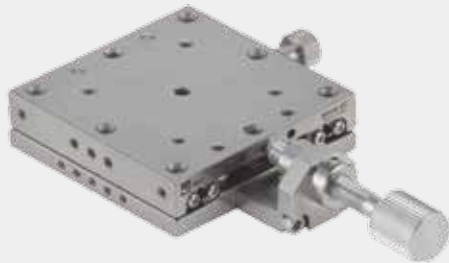

MX60-SS-28



MY60-SC-28



MY60-SS-28




Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation (mm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX60-SC-28	60*60	X-axis	Central	±6.5	0.5	5	20	0.4	SUS 440C	Electroless nickel plating
MX60-SS-28			Side							
MY60-SC-28		XY-axis	Central				19.6	0.8		
MY60-SS-28			Side							


MX60-SC-28

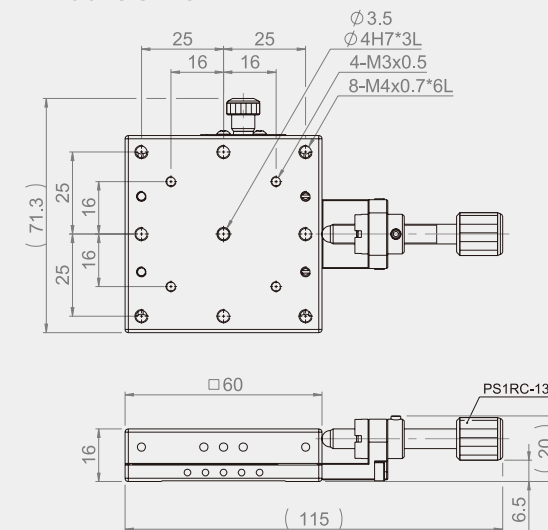


MX60-SS-28

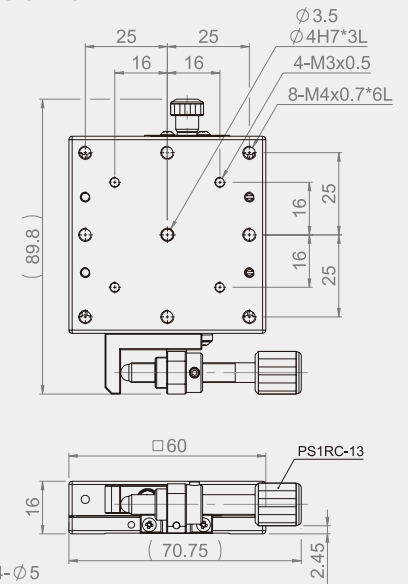

MY60-SC-28

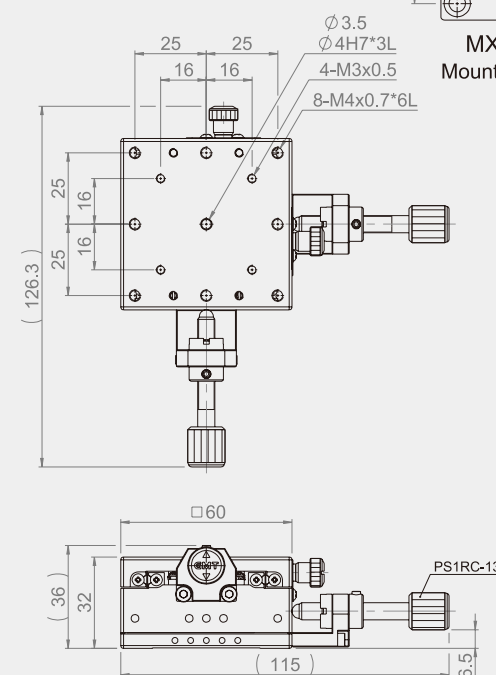

MY60-SS-28

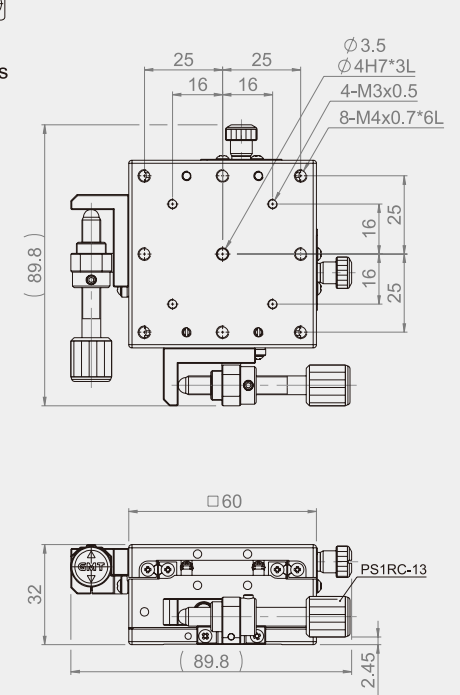

MX(Y)60-S-28
Mounting Dimensions

MX70-SC-28



MX70-SS-28



MY70-SC-28



MY70-SS-28




Specification


Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation (mm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX70-SC-28	70*70	X-axis	Central	±6.5	0.5	3	23	0.58	SUS 440C	Electroless nickel plating
MX70-SS-28			Side							
MY70-SC-28		XY-axis	Central				22.4	1.16		
MY70-SS-28			Side							

Unit : mm


MX70-SC-28

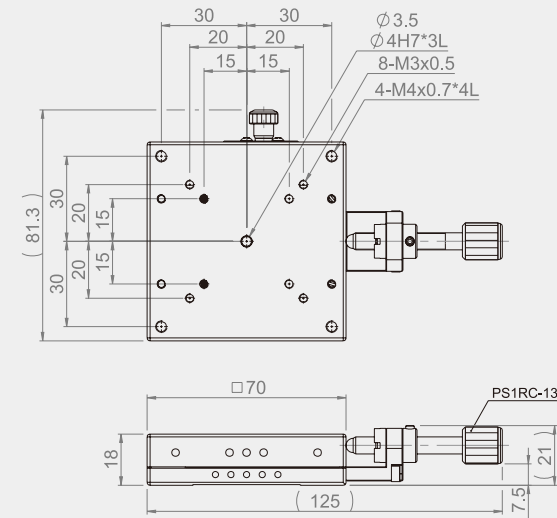


MX70-SS-28

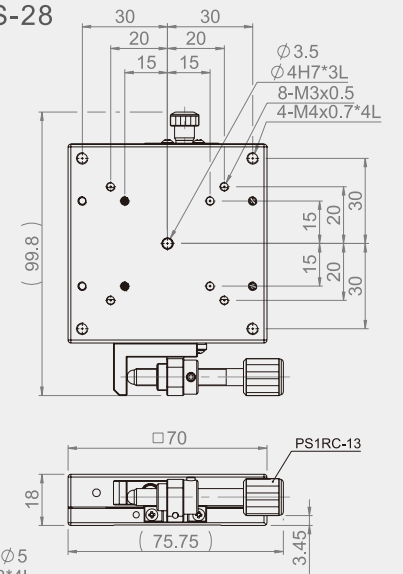

MY70-SC-28

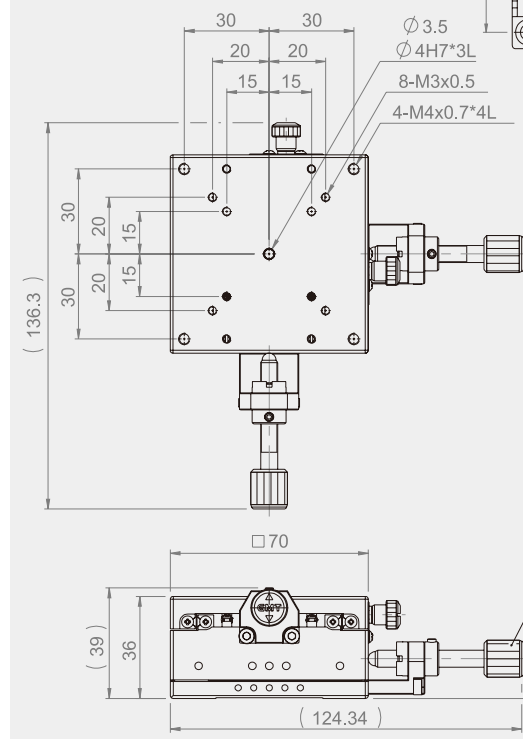

MY70-SS-28

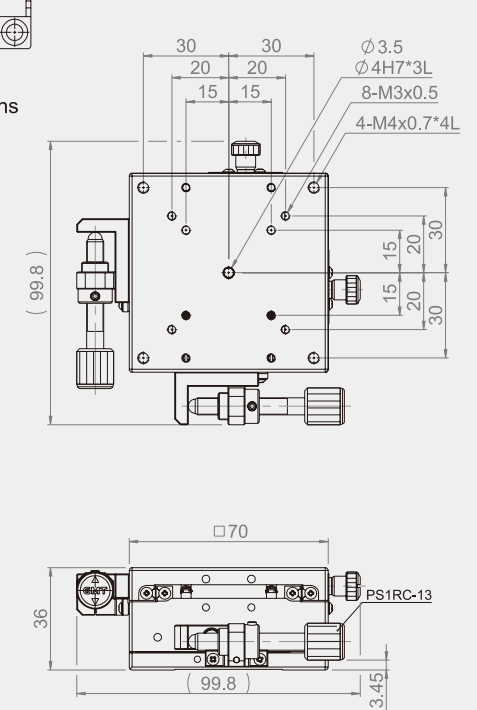

MX(Y)70-S-28 Mounting Dimensions

MX80-SC-28



MX80-SS-28



MY80-SC-28



MY80-SS-28




Specification


Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation (mm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX80-SC-28	80*80	X-axis	Central	±12.5	0.5	3	27	0.9	SUS 440C	Electroless nickel plating
MX80-SS-28			Side							
MY80-SC-28		XY-axis	Central				26.1	1.8		
MY80-SS-28			Side							

Unit : mm


MX80-SC-28

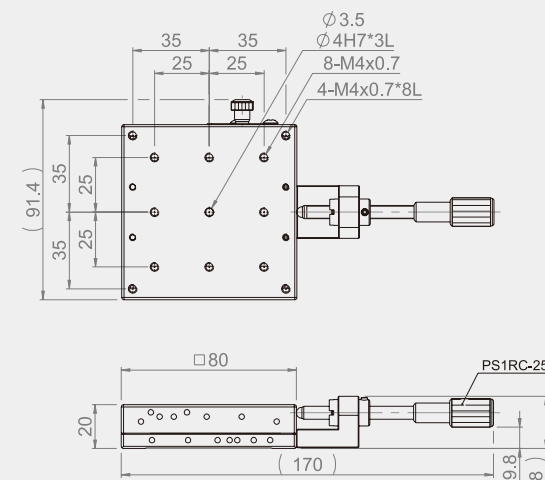


MX80-SS-28

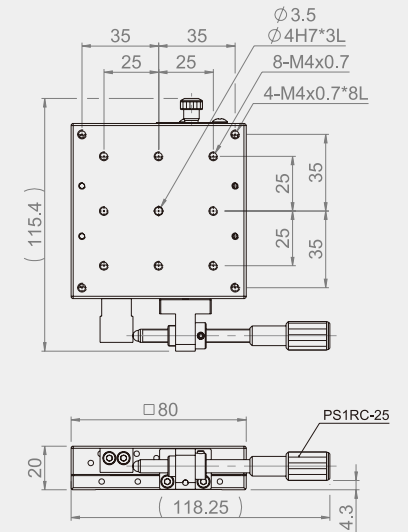



MY80-SC-28

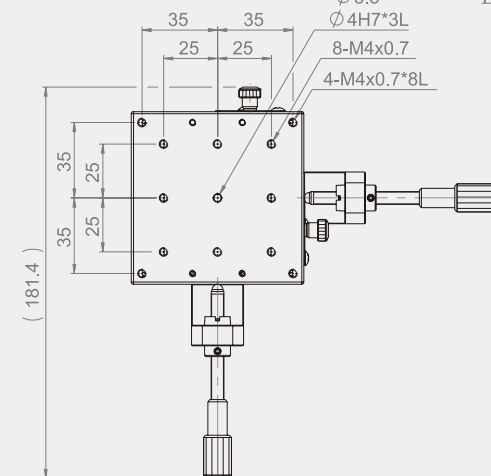

MY80-SS-28

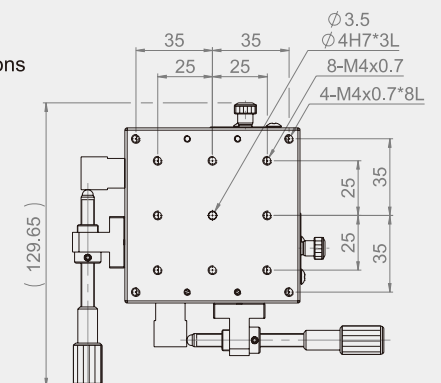


MX(Y)80-S-28
Mounting Dimensions

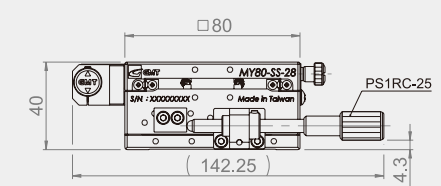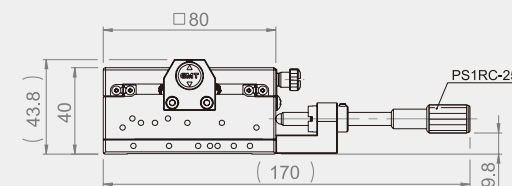

MX100-SC-28




MX100-SS-28

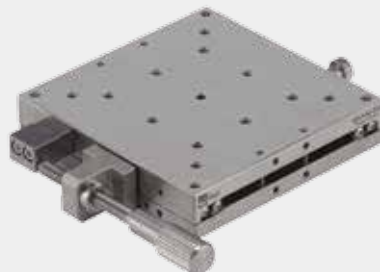

MY100-SC-28



MY100-SS-28

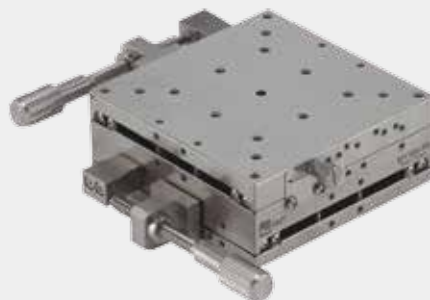


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Movement Per Knob Rotation (mm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX100-SC-28	100*100	X-axis	Central	±12.5	0.5	3	35	1.33	SUS 440C	Electroless nickel plating
MX100-SS-28			Side							
MY100-SC-28		XY-axis	Central				33.6	2.66		
MY100-SS-28			Side							


MX100-SC-28

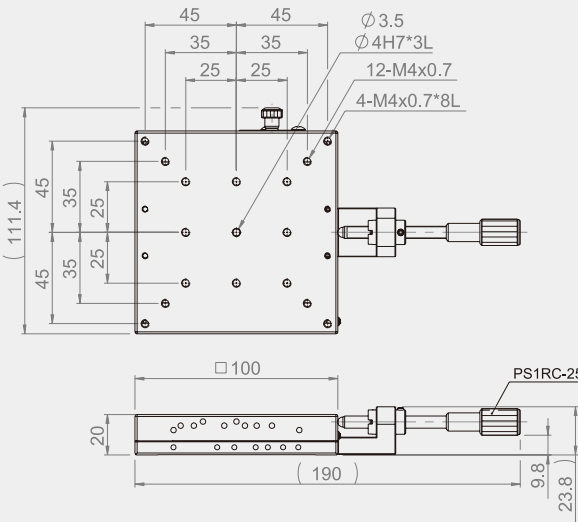

MX100-SS-28

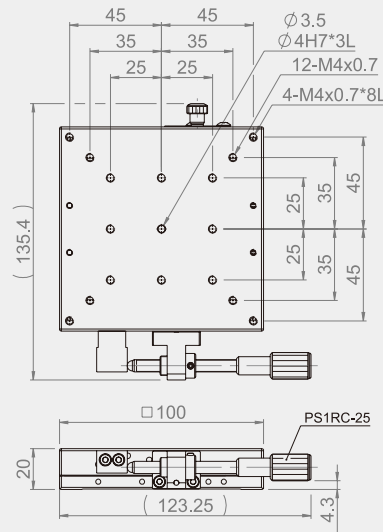


MY100-SC-28

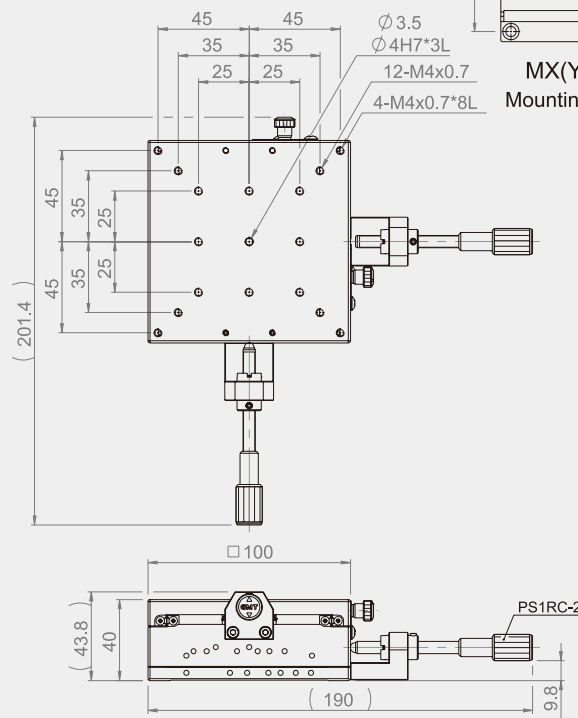

MX(Y)100-S-28
Mounting Dimensions

MY100-SS-28

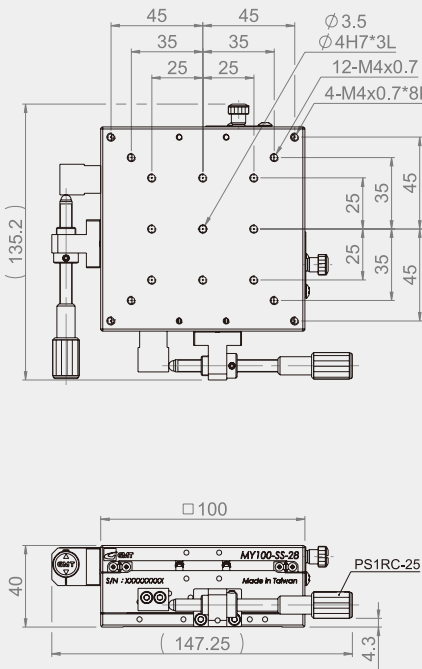

MX60L-SS-28



Specification

Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX60L-SS-28	60*120	X-axis	Side	±12.5	10	3	16	0.76	SUS440C	Electroless nickel plating

