

MX50-AC




MX50-AS



MY50-AC



MY50-AS

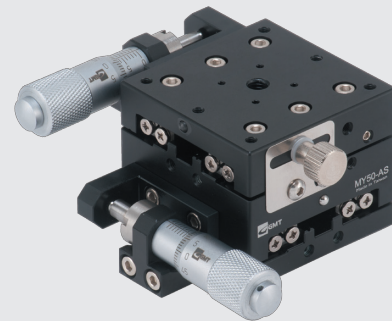


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX50-AC	50*50	X-axis	Central	±6.5	10	3	4	0.22	Aluminum alloy	Black anodized
MX50-AS			Side							
MY50-AC		XY-axis	Central					0.44		
MY50-AS			Side							


MX50-AC

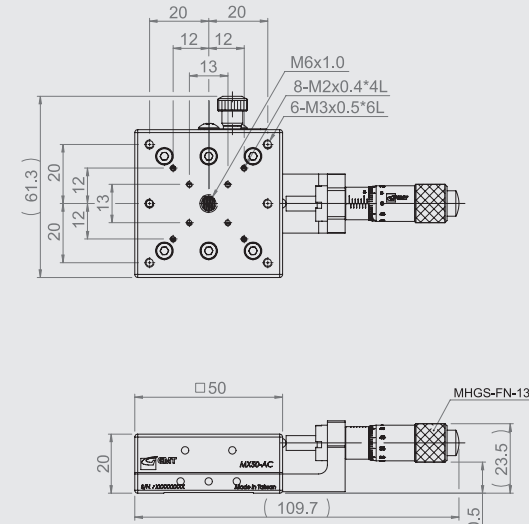


MX50-AS

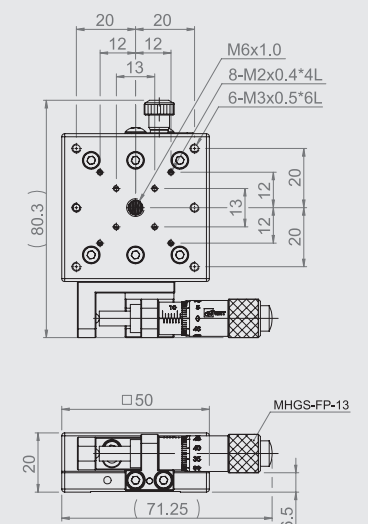

MY50-AC

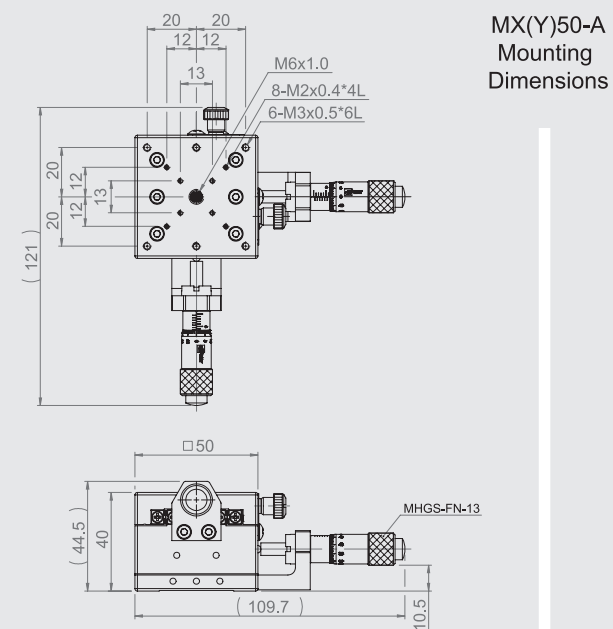


MY50-AS

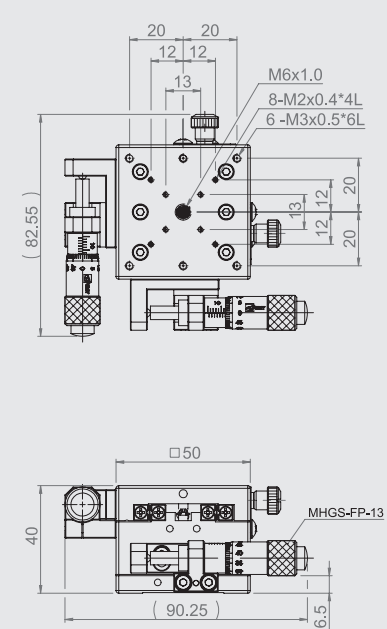


MX(Y)50-A
Mounting
Dimensions


MX60-AC

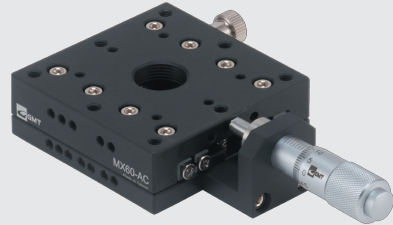


MX60-AS



MY60-AC

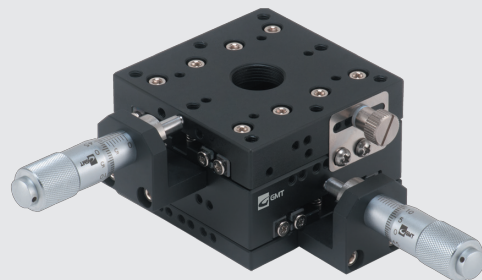

MY60-AS

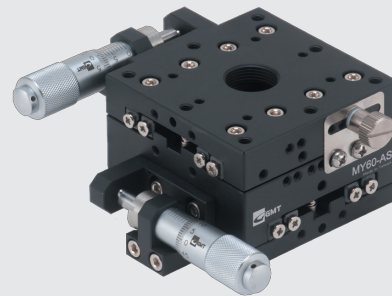


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX60-AC	60*60	X-axis	Central	±6.5	10	3	5	0.25	Aluminum alloy	Black anodized
MX60-AS			Side							
MY60-AC		XY-axis	Central				4.5	0.52		
MY60-AS			Side							


MX60-AC

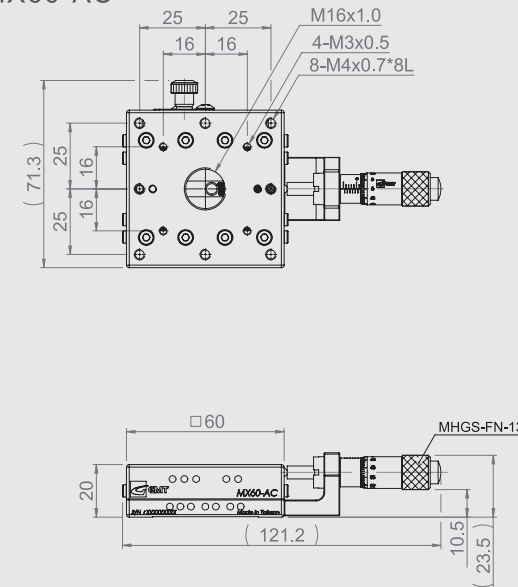


MX60-AS

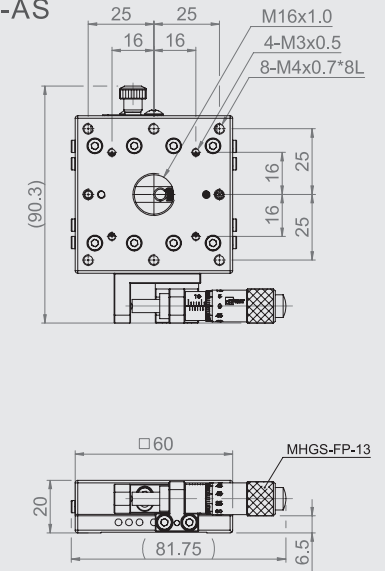

MY60-AC

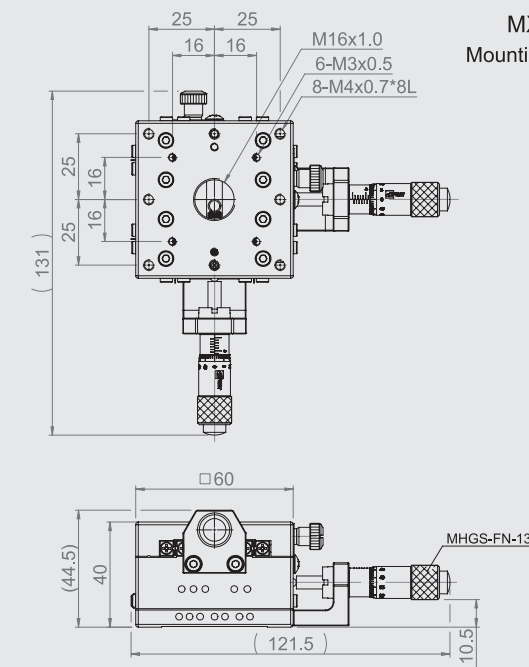


MY60-AS

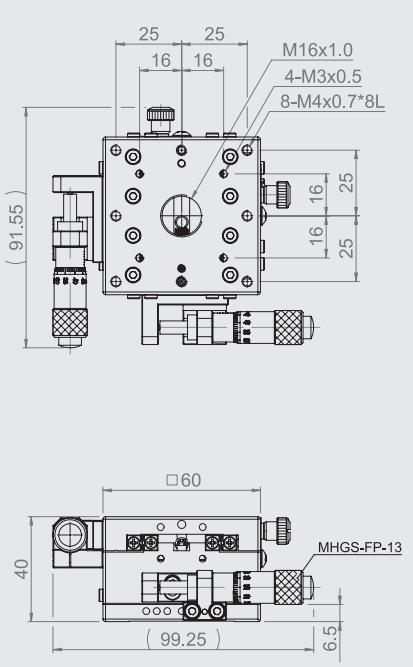


MX(Y)60-A
Mounting Dimensions


MX70-AC

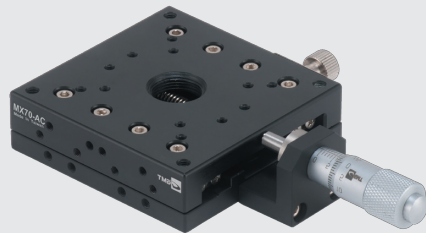


MX70-AS



MY70-AC

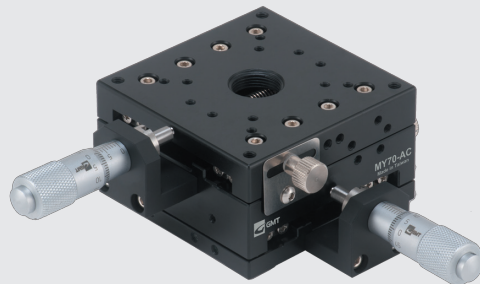

MY70-AS

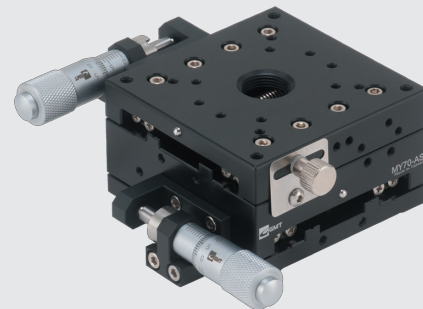


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX70-AC	70*70	X-axis	Central	±6.5	10	3	6	0.44	Aluminum alloy	Black anodized
MX70-AS			Side							
MY70-AC		XY-axis	Central							
MY70-AS			Side							


MX70-AC

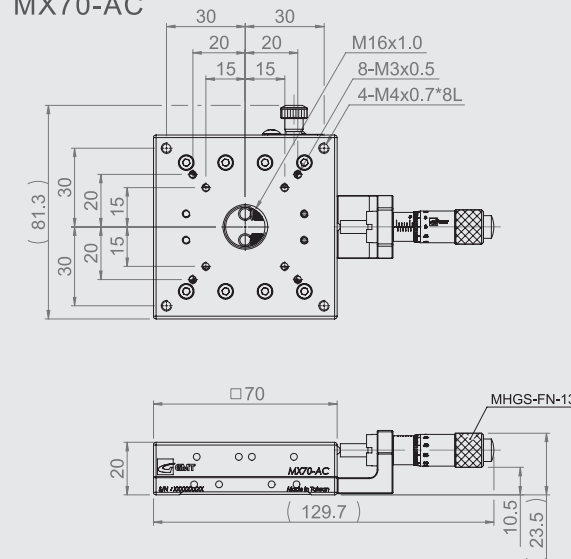


MX70-AS

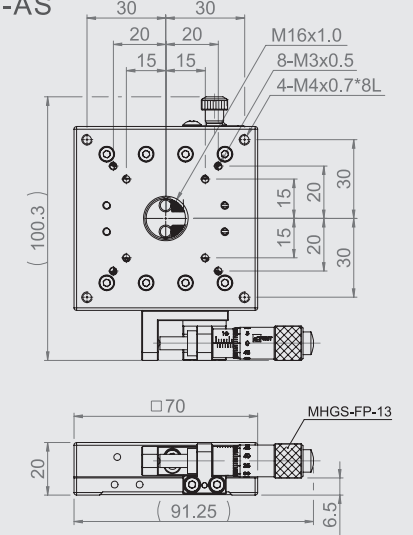


MY70-AC

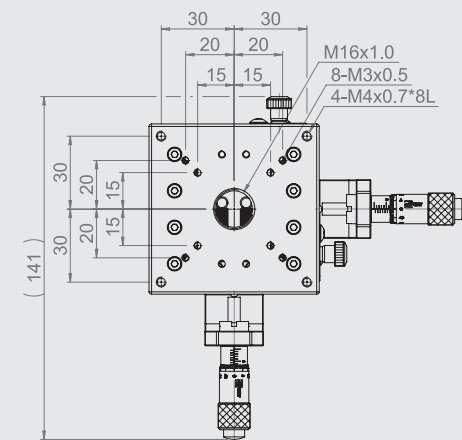


MY70-AS

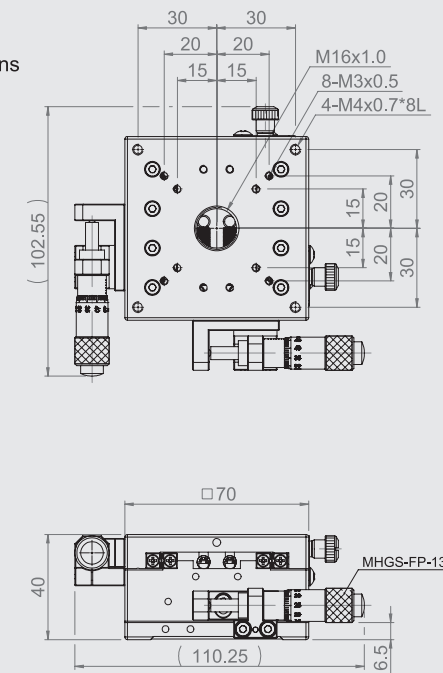


MX(Y)70-A
Mounting Dimensions




MX80-AC

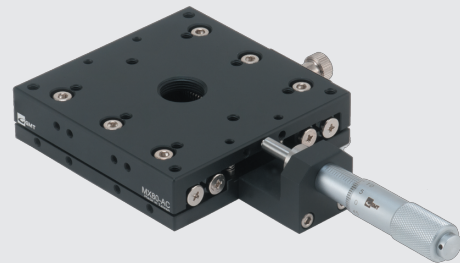


MX80-AS



MY80-AC

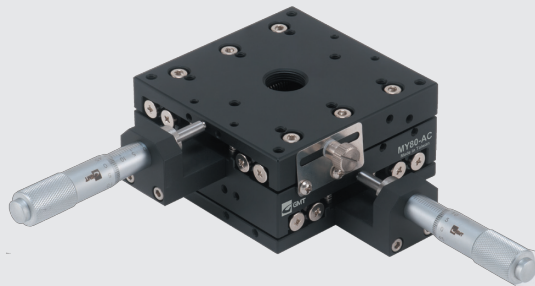

MY80-AS

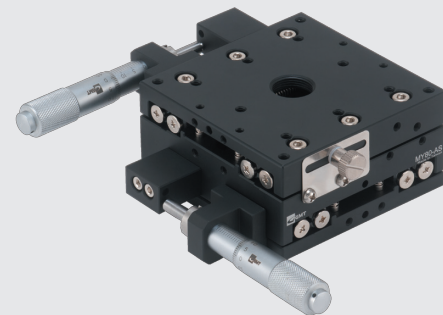


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX80-AC	80*80	X-axis	Central	±12.5	10	3	10	0.5	Aluminum alloy	Black anodized
MX80-AS			Side							
MY80-AC		XY-axis	Central				9.5	1		
MY80-AS			Side							


MX80-AC

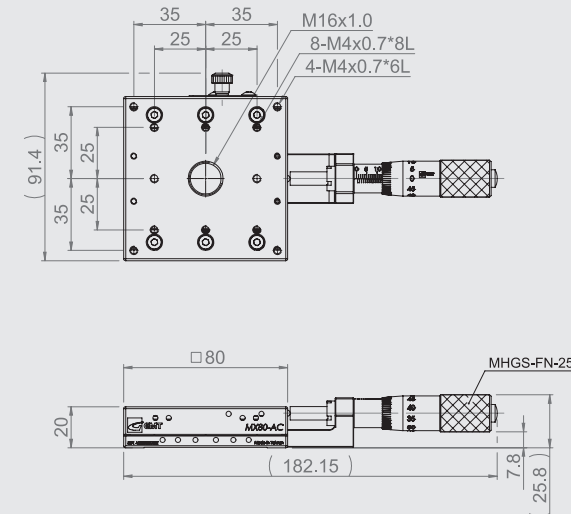


MX80-AS

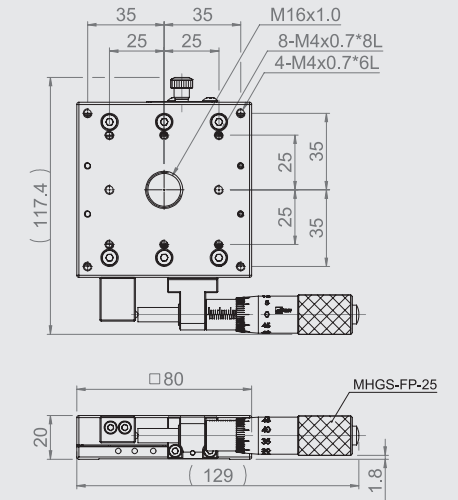


MY80-AC

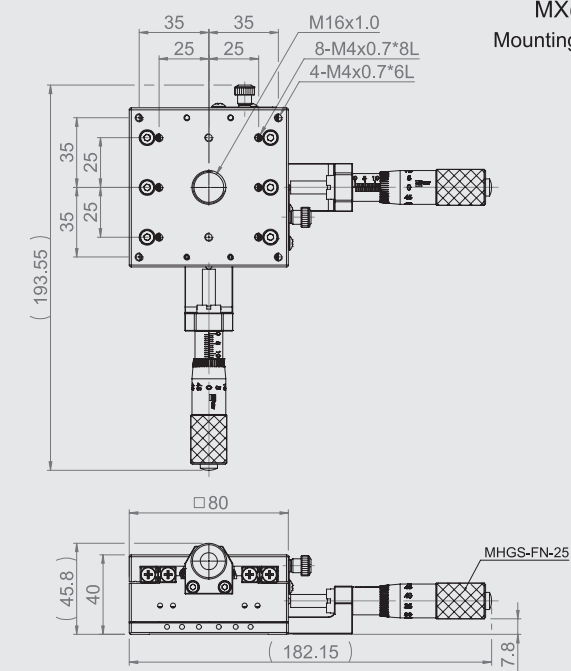


MY80-AS

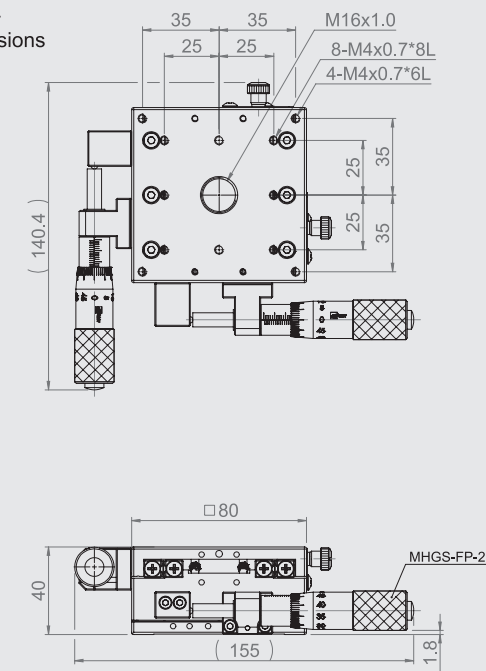


MX(Y)80-A
Mounting Dimensions




MX100-AC

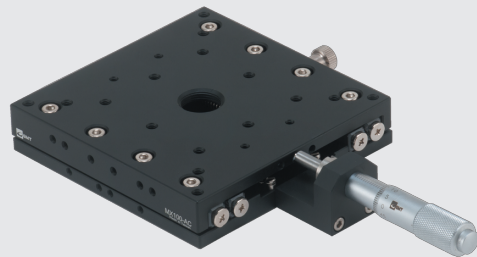


MX100-AS

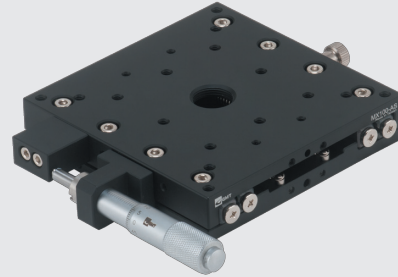

MY100-AC

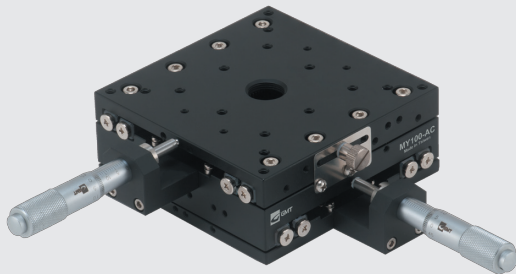

MY100-AS

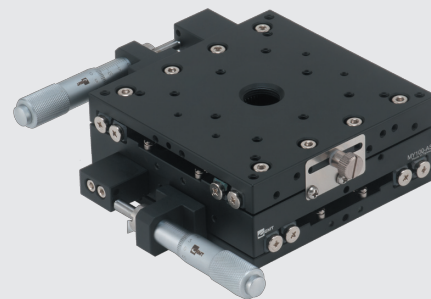


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX100-AC	100*100	X-axis	Central	±12.5	10	3	15	0.7	Aluminum alloy	Black anodized
MX100-AS			Side							
MY100-AC		XY-axis	Central				14.3	1.4		
MY100-AS			Side							


MX100-AC

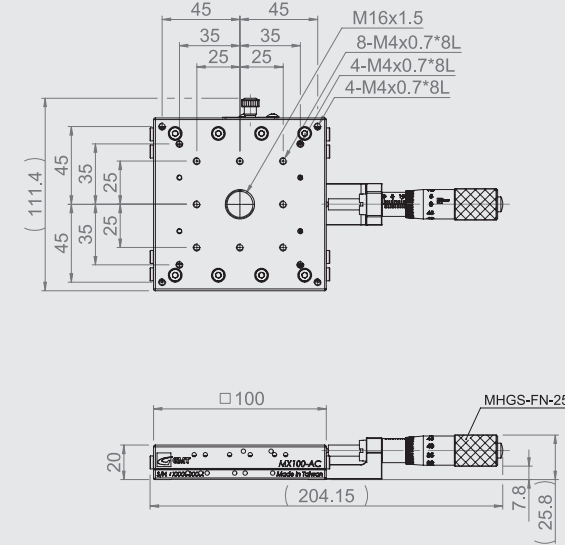


MX100-AS

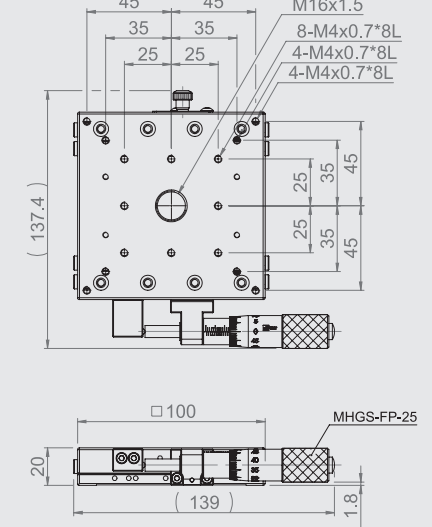


MY100-AC

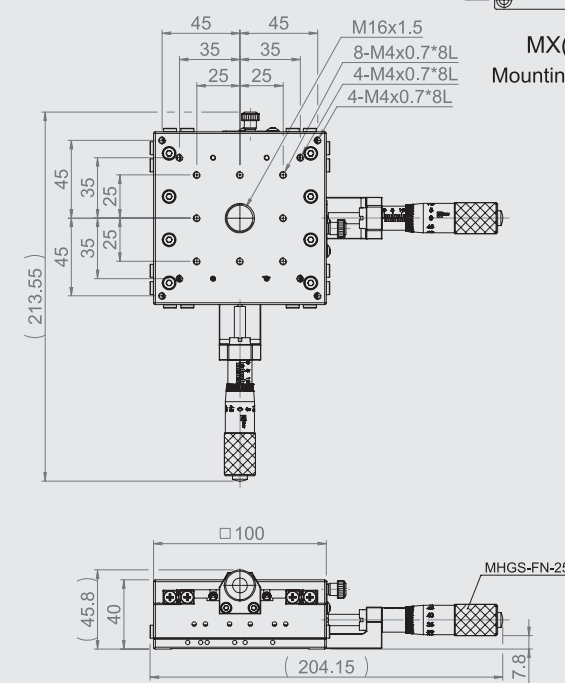


MY100-AS

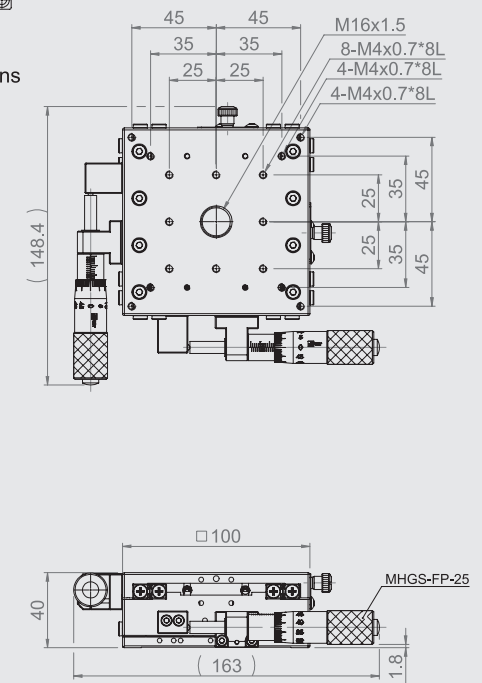


MX(Y)100-A
Mounting Dimensions

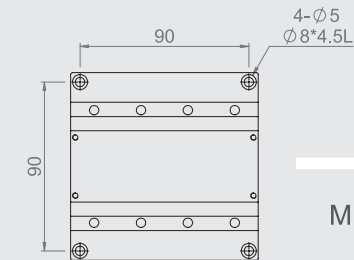


MX120-AC

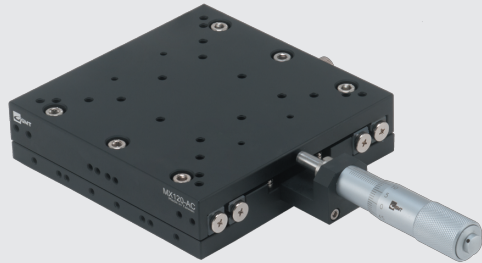


MX120-AS

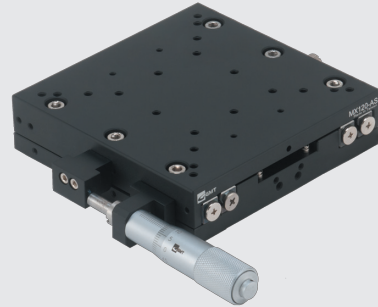

MY120-AC

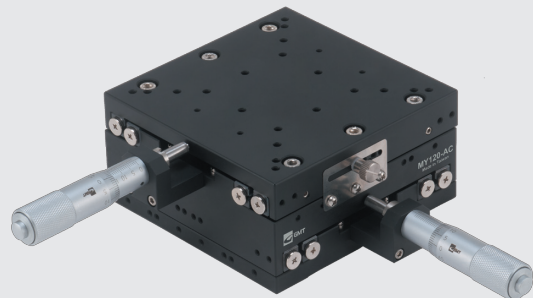

MY120-AS

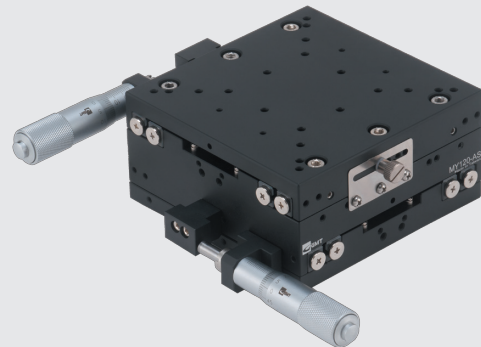


Specification


Unit : mm

Model No.	Table Size	Axis	Feed Position	Travel Stroke	Micrometer Minimum Reading (μm)	Straightness Accuracy (μm)	Allowable Loading (kgf)	Weight (kg)	Material	Surface Finish
MX120-AC	120*120	X-axis	Central	±12.5	10	3	20	1.6	Aluminum alloy	Black anodized
MX120-AS			Side							
MY120-AC		XY-axis	Central				18.4	3.2		
MY120-AS			Side							


MX120-AC

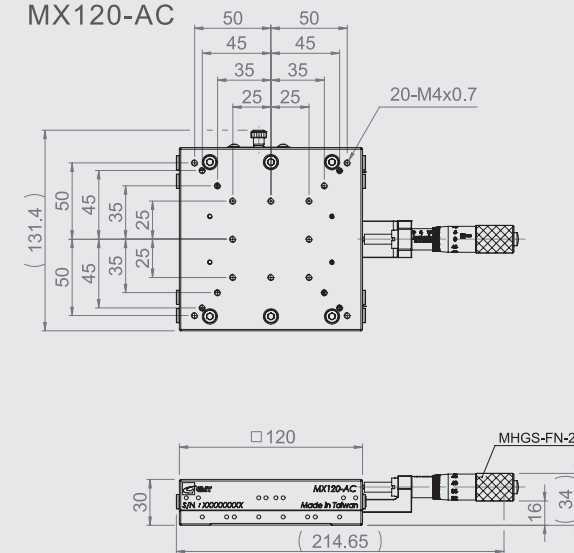


MX120-AS

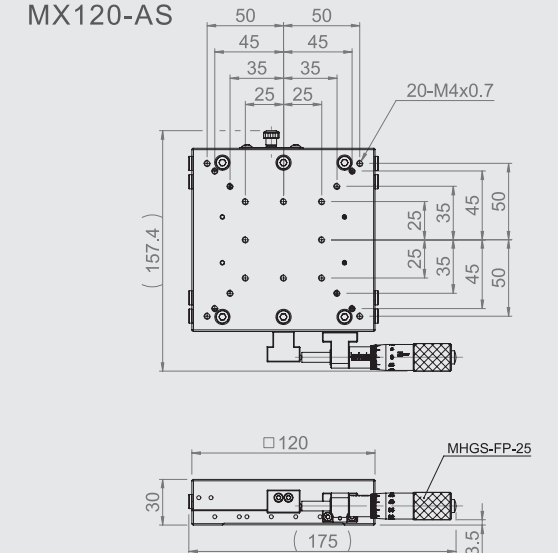

MY120-AC

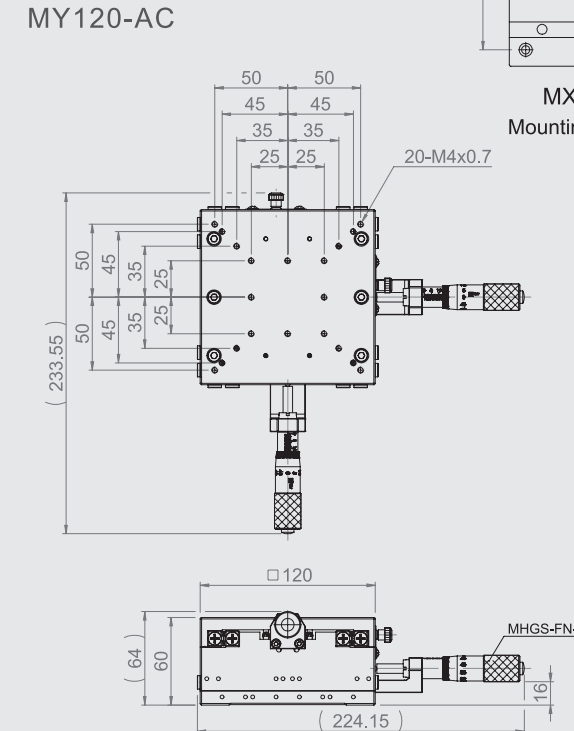

MY120-AS

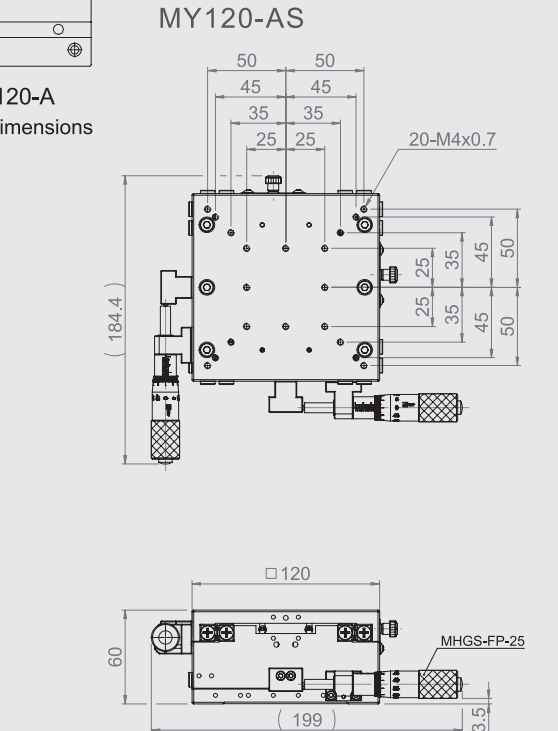

MX(Y)120-A
Mounting Dimensions

